

WDPHXX Series

Solenoid-driven dosing pumps with controller



MAX FLOW

10 l/h

MAX PRESSURE

7 bar

POWER SUPPLY


230 VDC

115 VAC

VENTING

Manual

Self

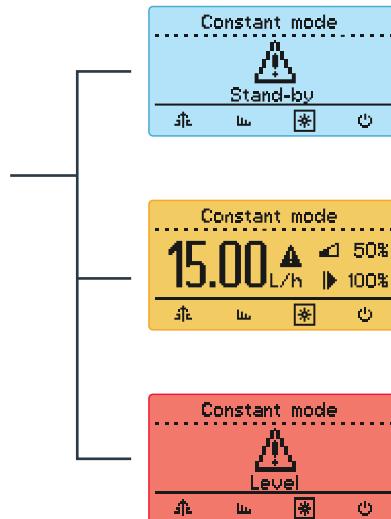

DIGITAL

WDPH RH | CL | CF | CA | OS

- WDPHRH** acid (pH) and disinfectant (ORP)
- WDPHCL** acid (pH) and chlorine
- WDPHCF** acid, flocculant (g/h) and 230VAC output for Cl
- WDPHCA** acid, algicide and 230VAC output for chlorine
- WDPHOS** acid (pH) and active oxygen

PUMP HEADS

Also available with configuration:

■ Manual venting

■ Self venting



PVDF

PP

FEATURES

- Specific for swimming pools also in peristaltic version
- Control and regulating instrument with two built-in dosing pumps and standard PVDF accessories
- Wall mounting
- Easy programming with encoder and easy-nav navigation system
- Double pump head
- RS485 port for remote control (Wi-Fi, Ethernet, GSM, USB, Modbus)

ACCESSORIES



Foot filter with level probe



Injection valve 1/2"